


Date of Order:	Customer:	Ship To:
Job Name:	P.O. Number:	Contact/Phone#:
Quote #:	Requested Ship Date:	



1 Finish: #40 Dark Bronze
 #14 Clear
 #17 Clear
 #29 Black
 Paint Code # _____
Hardware finish:
 #14 Clear #29 Black #40 Dark Bronze

2 Door Type: 190 Narrow (STD)
 350 Heavywall 350 Medium (STD)
 500 Heavywall 500 Wide (STD)

3 Frame Options: Not Required

<i>Center</i>	<i>Front</i>	<i>Openback</i>	<i>Transom</i>
<input type="checkbox"/> TF400	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/> TF450	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/> TF451	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/> TF601	-	-	<input type="checkbox"/>

Transom Frame - Height: _____ (Max 144")
 1600 3/4" Adapter for 1" glass (162043)*
 1600 3/4" Adapter for 1/4" glass (162044)*
 1600 3/4" Adapter (Universal 162089)*
 1600 7/8" Adapter (Universal 163036)*
 *Adapter frames include header

4 Hand	Qty	Mark/Reference
<input type="checkbox"/> RHOS (HLSO)	_____	_____
<input type="checkbox"/> LHOS (HRSO)	_____	_____
<input type="checkbox"/> Pair - LHOS Act	_____	_____
<input type="checkbox"/> Pair - RHOS Act	_____	_____
<input type="checkbox"/> HLDA Single	_____	_____
<input type="checkbox"/> HRDA Single	_____	_____
<input type="checkbox"/> PRDA - HL Act	_____	_____
<input type="checkbox"/> PRDA - HR Act	_____	_____

*Max Order Size for Program: 20 Doors + 20 Frames

5 Door Opening:
 Door Opening Width: _____
 Door Opening Height: _____
Max: 4'0" x 10'0" (Oversize doors req eng review)

Hinging (Kawneer Standard)
 Offset Pivots # Intermediates _____
 Butt Hinges # Intermediates _____ *
 M-19 Pivots # Intermediates _____
Doors over 76" add (1) int pivot
**Recommended # of Intermediate Butts w/ 1" Door Glass:*
Up to 73" add (1); 73" - 83" add (2); Over 83" add (3)

Continuous Hinges (780-112HD)
 Center Hung >>> End Load Side Load
 Finger Guard (option for Center Hung)
 Blank (Beveled Rabbetted stile) *
 Blank (Beveled stile) *
***Must specify hinge mfg/model using:**

7 Locking Hardware:
 Not Required AR 4510LL/4560 Lever*
 AR MS1850* AR 4510LL/4590 Paddle*
 AR MS1850 Short Throw Controller (Pair Only)
 AR MS1850 Hookbolt 3 point lock (Pair Only)
 AR MS+1890/4560 Flushbolts*
*(*Std w/ MS Lock or 4510 on Pairs)*

Panics:
 Kawneer 1686 CVR MEL (1) Cyl Dogging
 Falcon 1690 CVR EL (2)
 Kawneer 1786 Rim MEL (1) Cyl Dogging
 Falcon 1790 Rim EL (2)
 Paneline Panic MEL (4)
 Falcon 1990 CVR
 Falcon 2090 Rim
 AR 8400 Mortise (STD Only)
 AR 8600 CVR (STD Only)

Electric Options:
 VD EPT-2 VD EPT-10 Securitron EPT
 Elec Int Pivot HES 7089 EI Strike (1790 Only) (3)
 Elec Butt Hinge AR 7130 EI Strike (4510 & 8400)(3)

Power Supplies:
 SP1000X (2) Power Supply Qty: _____
 NP 1 (1) Up to 2 devices Qty: _____
 SP2000 (4) Power Supply Qty: _____
 Altronix AI175UL (3) Qty: _____

Locking Options:
 Exterior Cylinder Dummy Cylinder (Ext.)
 Cylinder both sides Dummy Cylinder (Int.)
 Cylinder Guard Exit Indicator (Int.)
Note: Cylinder/Thumbturn is standard on MS Locks

8 Push/Pulls Hardware
 Not Required CO-9 with Panic
 CO-9/CP (Std.) CO-12 with Panic
 CO-9/CP-II* CPN with Paneline
 CO-12/CP CO-12's Back to Back
 CO-12/CP-II* CP's Back to Back
 CO-9's Back to Back CPII's Back to Back*
***CPII only comes in DOW's of 36" and 42"**
***CPII not available for Double-Acting doors**

Push/Pull finish:
 #14 Clear #29 Black #40 Dark Bronze

9 Top Rail: Standard
 Deep Web (specify): _____

10 Bottom Rail: Std: 190 = (3 7/8") 350/500 = (6 1/2")
 7 1/2" (STD) 10" (STD & HW) 12" (STD)


11 Glass Stops:
 1/4" Beveled 5/8" Square
 1/4" Square 3/4" Square*
 3/8" Square* 1" Square
 1/2" Square* (*) Not available for Heavywall

12 Closers: Not Required
Concealed: Calibre 690 LCN 4040
 LCN 2030 Norton 1601
 LCN 5030 Norton 8101
 International
Closer options:
 Parallel Arm Drop Plate Hold Open*
 Cover *Hold Open: 90 or 105 (100 max 5030)
Note: 32" Min/42" Max Size for 690 & 2030, 48" Max for 5030

13 Thresholds: Standard Door Sweeps
 K-Std: 4" (11/16" btm clearance)
 K-Std: 6 3/4" (11/16" btm clearance)
 (6 3/4" threshold is centered on frame)
 No T-Hold (11/16" btm clearance)*
 No T-Hold, Custom Btm Clr: _____
 *If No T-hold and O/P hinging req'd, advise **Floor** or **Frame** mount bottom pivot

14 Cross Rails:
 Number of X-Rails Required: _____ Not Required
 (If more than 2 X-Rails, drawing must accompany order)
 ** Dimension is from **bottom of door to top of CR** **

5/16" (STD & HW)
 7/8" (STD) *Write on lines provided Loc of Xrail*
 1 3/8" (STD)
 2" (HW)
 2 1/4" (STD)
 3 1/2" (STD & HW)
 6" (STD & HW)
 8 1/4" (STD)
 8 7/16" (HW)

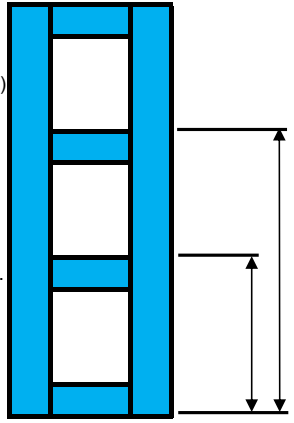

Cross Rail "dim" does not include glass stops.

NOTICE:
ALL BOXES OF ORDER FORM MUST BE FILLED OUT IN ORDER TO QUALIFY FOR THIS PROGRAM. NO DEVIATIONS FROM LISTED OPTIONS WILL BE ACCEPTED. IF ORDER FORM IS NOT 100% COMPLETE, YOUR ORDER WILL NOT BE PROCESSED FOR THIS PROGRAM AND WILL NOT BE SCHEDULED
THANK YOU FOR YOUR ORDER!
STD = Standard Door (1 3/4") / HW = Heavywall (2")